

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007793 A1

(51) International Patent Classification⁷: **C12C 11/00**

(21) International Application Number:
PCT/CA2004/001027

(22) International Filing Date: 13 July 2004 (13.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,435,422 16 July 2003 (16.07.2003) CA

(71) Applicant (for all designated States except US): **LABATT
BREWING COMPANY LIMITED** [CA/CA]; 150 Sim-
coe Street, London, Ontario N6A 4M3 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AUSTIN, Glen, D.**
[CA/CA]; 279 Base Line Road East, London, Ontario N6C
2P2 (CA).

(74) Agent: **KERR, James, W.**; 303 Richmond Street, London,
Ontario N6B 2H8 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: A PROCESS FOR FOAM CONTROL IN BREWERY FERMENTATIONS

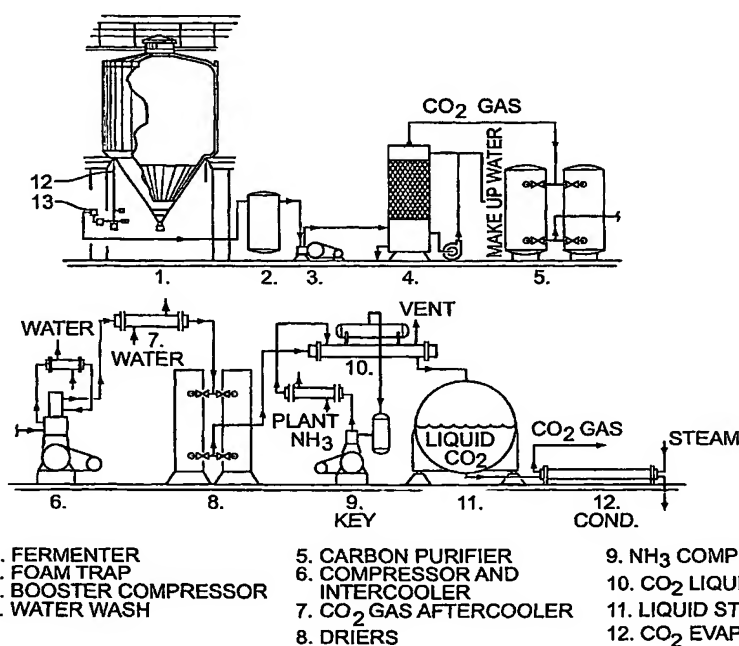

(57) Abstract: A method of controlling the foam generated during a beer wort fermentation is provided in which the pressure in the wort - containing tanks such as a fermentor is varied according to a cycle which allows the pressure to rise to a value preferably of less than about 14.9 psig when it is released until the foam bed stabilizes. The cycle is then repeated. The improved methods allow for less headspace in the vessel and greater efficiency in carbon dioxide collection.

WO 2005/007793 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.